

KINREI of America

HK-300 Double Twist Strander



- 8000 Twist Per Minute
- 12" (304 mm) Spool capability
- Capable of stranding to 22 - 40 AWG
- Constant tension take up system
- Sealed Grease Type Main Bearings
- Integral loading platform


kinreiusa.com

KINREI
OF AMERICA

For more information contact:
973-677-9500 or sdonnelly@kinreiusa.com

KINREI of America

HK-300 Double twist Strander

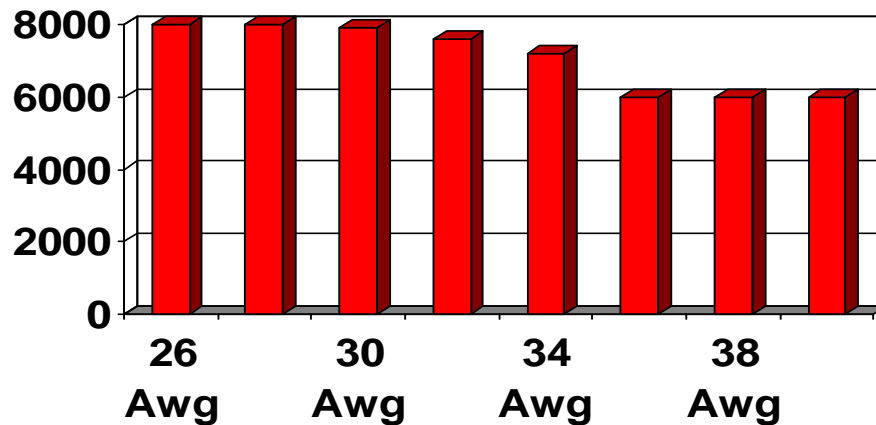

- 7.5 KW Main Drive Motor
- AC Frequency Inverter for Speed Regulation
- Lay Range from .041" > .395" (1.06 mm > 10.05 mm)

Flange Diameter	Barrel Diameter	Traverse Width	Over All Width	Bore Diameter
12.59" Max 320 mm	6.37" Max 162 mm	6.96" Max 177 mm	8.5" Max 217 mm	1" Diameter 25.4 mm

kinreiusa.com

KINREI
OF AMERICA

For more information contact:
973-677-9500 or sdonnelly@kinreiusa.com