

KINREI of America

HK-630 Double Twist Strander



- 6000 Twist Per Minute
- 24" (630 mm) Spool capability
- Capable of stranding to 10 - 26 AWG
- Constant tension take up system
- Oil lubrication system
- Integral loading platform


kinreiusa.com

KINREI
OF AMERICA

For more information contact:
973-677-9500 or sdonnelly@kinreiusa.com

KINREI of America

HK-630 Double Twist Strander

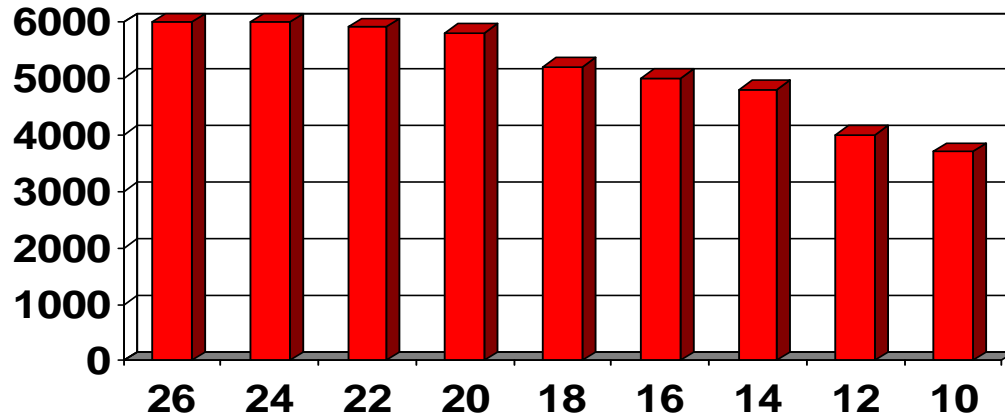

- 15 KW Main Drive Motor
- AC Frequency Inverter for Speed Regulation
- Lay Range from .32" > 2.95" (8.2 mm > 75 mm)

Flange Diameter	Barrel Diameter	Traverse Width	Over All Width	Bore Diameter
24" Max 630 mm	14" Max 355 mm	17" Max 407 mm	18.7" Max 440 mm	5" Diameter 150 mm

kinreiusa.com

KINREI
OF AMERICA

For more information contact:
973-677-9500 or sdonnelly@kinreiusa.com