

KINREI of America

NB-760 Double Twist Strander



- 5500 Twist Per Minute
- 30" (760 mm) Spool capability
- Capable of stranding to 10 - 26 AWG
- Constant tension take up system
- Recirculating Oil lubrication system
- Integral loading platform


kinreiusa.com

KINREI
OF AMERICA

For more information contact:
973-677-9500 or shess@kinreiusa.com

KINREI of America

NB-760 Double Twist Strander

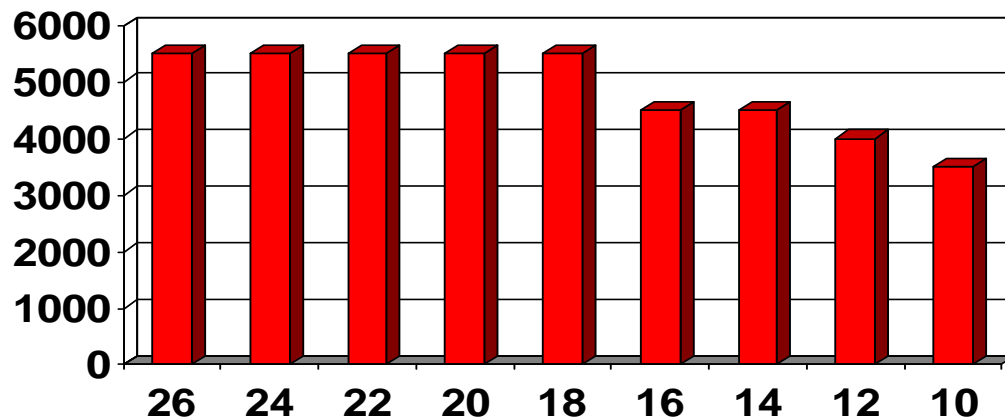

- 18.5 KW Main Drive Motor
- AC Frequency Inverter for Speed Regulation
- Lay Range from .032" > 2.95" (8.2 mm > 75 mm)

Flange Diameter	Barrel Diameter	Traverse Width	Over All Width	Bore Diameter
30" Max 760 mm	14" Max 355 mm	16" Max 407 mm	17.3" Max 440 mm	5" Diameter 150 mm

kinreiusa.com

KINREI
OF AMERICA

For more information contact:
973-677-9500 or shess@kinreiusa.com