


# KINREI of America

## TM-560 Double Twist Strander

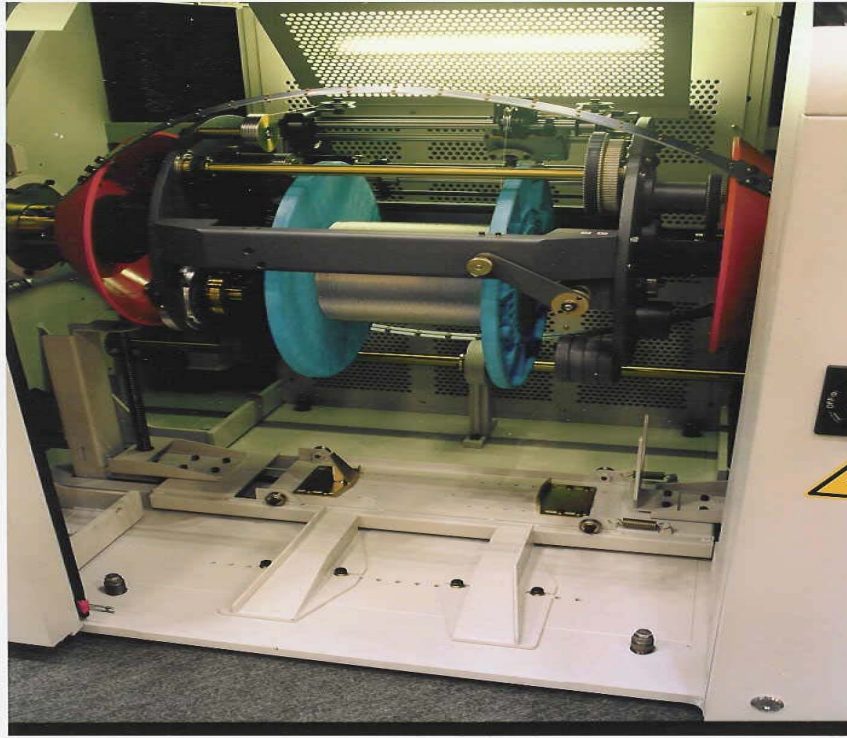

- 7000 Twist Per Minute
- Wide 22" (560 mm) Spool capability
- Capable of stranding to 7/25 or 19/29 down to 7/38 or 19/42
- Constant tension take up system
- Oil mist lubrication system
- Integral loading platform


[kinreiusa.com](http://kinreiusa.com)

**KINREI**  
OF AMERICA

For more information contact:  
973-677-9500 or [sdonnelly@kinreiusa.com](mailto:sdonnelly@kinreiusa.com)

# KINREI of America

## TM-560 Double Twist Strander

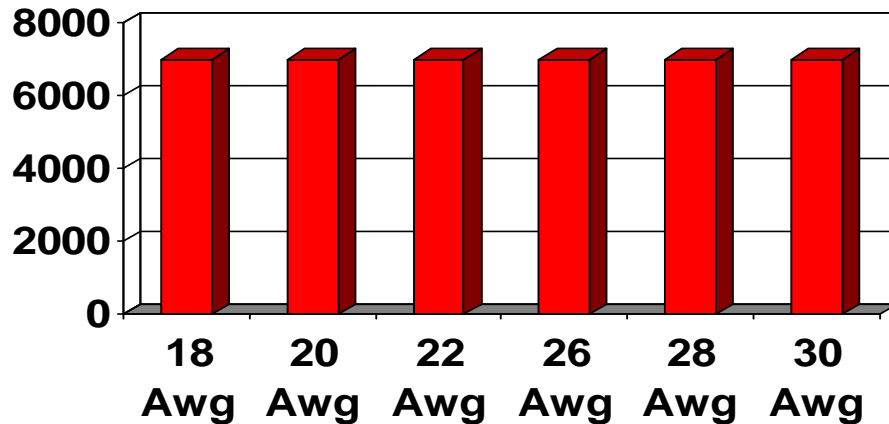

- 7.5 KW Main Drive Motor
- AC Frequency Inverter for Speed Regulation
- Lay Range from .125" > 1.2" (3.0 mm > 30.6 mm)

Flange Diameter	Barrel Diameter	Traverse Width	Over All Width	Bore Diameter
22" Max 560 mm	7.8" Max 200 mm	13" Max 330 mm	15.98" Max 406 mm	5" Dia. Max 125 mm

[kinreiusa.com](http://kinreiusa.com)

**KINREI**  
OF AMERICA

For more information contact:  
973-677-9500 or [sdonnelly@kinreiusa.com](mailto:sdonnelly@kinreiusa.com)