


KINREI of America


CB-1000 DOUBLE TWIST BUNCHER



Model:CB-1000

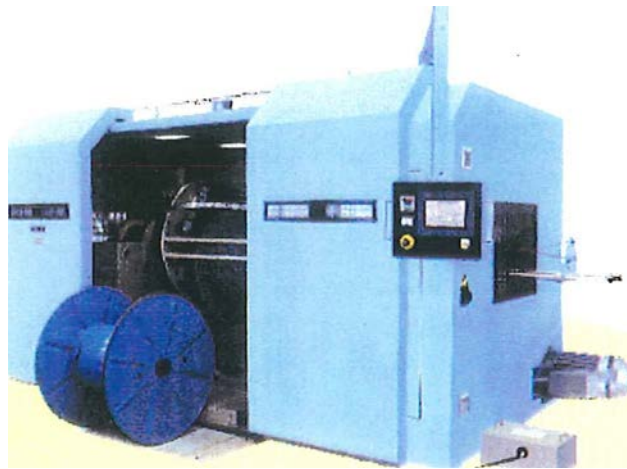

(Guide plate)

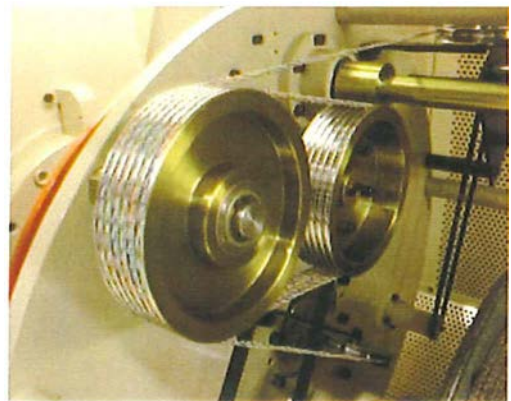

(Capstan)

Specs:

- | | | | |
|------------------------|--|----------------------------------|------------|
| 1. Uses | LAN Cat.5, 5E, 6, Twist Cabler | | |
| 2. Performance | Insulated core size | MIN. 1.5mm | MAX. 3.5mm |
| | Conductor size | MIN. 0.5mm | MAX. 0.9mm |
| | Rotating Speed | MAX. 2000TPM / 1000r.p.m. | |
| 3. Spool size | Flange diameter | MAX. 1000mm | |
| | Overall Width | MAX. 710mm | |
| | 4. Motor | 7.5KW / 4P AC Motor (MITSUBISHI) | |
| 5. Standard lay length | 21.16 to 150.38mm / Change gear type | | |
| 6. Reel support | Shaftless type / Automatic reel left | | |
| 7. Take-up tension | Automatic tension control from empty to full reel by Powder clutch control | | |
| 8. Automatic stop | Inner and outer wire break detector / Full wire length counter | | |
| 9. Dimension / Weight | 4758L x 1475D x 2250H mm (Machine center height 1258mm) / 9000kg | | |

kinreiusa.com

KINREI
OF AMERICA

For more information contact:
973-677-9500 or sdonnelly@kinreiusa.com